



ULTRAHIGH PRECISION

LVDT Gaging Probes

MACRO BBP 315

BBP/BBT 375 | BBP/BBT 375-A

Overview

The Macro Sensors BBP and BBT family of pencil-type gaging probes offers ultra-precise measurement of dimensions in a wide variety of Q.C., SPC, and industrial metrology applications. They utilize a linear ball bearing assembly precisely fitted to a hardened-and-ground, non-rotating probe shaft to minimize radial play and the effects of side loading. This results in the probes' exceptional repeatability of 0.000006 inch (0.15 μm).

One end of the probe shaft is coupled to the core of a friction-free LVDT sensor, which produces an output voltage that is linearly proportional to the probe shaft position. The use of an LVDT for probe shaft displacement sensing eliminates any additional transducer errors due to friction, stiction, or mechanical hysteresis. The output from the LVDT can be connected to any standard LVDT signal conditioner and then passed to a gaging column display, digital readout, or computer based data acquisition system.

The other end of the shaft is internally threaded to accept an interchangeable tungsten carbide contact tip for wear resistance and reliability. For normal applications, the probe shaft is fully extended by a spring exerting a force of about 2.5 ounces (70 grams) at the probe's mechanical zero position. The entire bearing, shaft, and LVDT assembly are enclosed in a stainless steel tubular housing.

Macro Sensors also offers an air-extend/spring-retract version of the 3/8" diameter models. During measurement cycles, the shaft is extended by introduction of a low-pressure (10-30 psi), clean, dry air supply, with a regulated flow, through a barbed fitting on the end of the unit for 1/8 inch I.D. hose. With the release of pressure, an internal spring returns the probe to its normal position.

The front of all BBP/BBT gaging probes is attached to a rubber bellows that also covers the probe shaft, thereby preventing contaminants from entering the bearing. From the rear end of the probe, a polyurethane - jacketed cable connects the LVDT's output to the signal conditioner. Each probe is supplied with a replaceable end piece that converts the axial cable exit to a radial cable exit to minimize overall installed length in space-critical applications. Probe sealing meets the requirements of IEC IP-65.

For setting up a probe in a fixture, the BBP/BBT gaging probes' mechanical design permits the user to make fine adjustments to the probe shaft's contact position with a small spanner wrench that is supplied. A positive stop prevents mechanical damage to the probe from repeated over stroking.

ULTRAHIGH PRECISION

BBP 315 | BBP/BBT 375 | BBP/BBT 375-A | LVDT Gaging Probes

Benefits

- Ultra-precision linear ball bearing assembly gives 0.000006 inch (0.15 μm) repeatability
- Industry-standard .375" (9.5 mm) and .315" (8.0 mm) diameters
- Industry-standard sizes and ranges
- Exceptionally long life; 200 million cycles
- Low pressure air-extend/spring-retract versions available (BBP 375-A and BBT 375-A)

Applications

- Industrial gaging systems
- Electronic dial indicators
- Fabricated metal products gaging
- Materials testing apparatus
- Large shaft TIR measurements

General Specifications

Excitation Voltage	3.0 Vrms (nominal)
Excitation Frequency	5 kHz
Output Load	100,000 Ohms (min.)
Operating Temperature	+15 °F to +175 °F -10 °C to +80 °C
Non-Linearity	< 0.5% of Reading
Repeatability Error	< 0.000006" < 0.15 μm

Configurations

BBP 315 Series gaging probes have an 8 mm diameter housing. BBP 375 Series gaging probes have a 3/8 inch diameter housing. BBT 375 Series gaging probes have a 3/8 inch diameter housing that is partially threaded with an industry standard 3/8-40 UNS thread. Standard ranges normally in stock are shown in the specification table. On special order, BBP probes are available in shorter ranges of ± 0.010 inches and ± 0.020 inches, or in standard ranges configured for air-extend, spring retract operation in automatic gaging systems. Consult the factory for details on these units and other custom variations.

Macro Sensors uses gaging-industry standard color coding and LVDT connections for the BBP and BBT cables, which are 6.5 feet (2 m) long and supplied with stripped and-tinned ends. On special order and at extra cost, they can be supplied with one of several popular connectors wired to the cable end and with "standardized" sensitivities. Consult the factory for pricing and connector availability.


ULTRAHIGH PRECISION

BBP 315 | BBP/BBT 375 | BBP/BBT 375-A | LVDT Gaging Probes

BBP 315 Specifications

Model ▶	BBP 315-040	BBP 315-100	BBP 315-200
Parameter ▼			
Range (inches)	±0.040	±0.100	±0.200
Range (mm)	±1.0	±2.5	±5.0
Sensitivity (mV/V/.001 in)	5.3	3.8	2.7
Sensitivity (mV/V/mm)	210	150	105
Pretravel (inches)	0.006	0.006	0.006
Pretravel (mm)	0.15	0.15	0.15
Overtravel (inches)	0.014	0.033	0.033
Overtravel (mm)	0.35	0.85	0.85
Dimension "A" (inches)	1.89	2.68	3.58
Dimension "A" (mm)	48.0	68.0	91.0
Dimension "B" (inches) (fully extended)	0.56	0.69	1.01
Dimension "B" (mm) (fully extended)	14.15	17.65	25.65


BBP 315

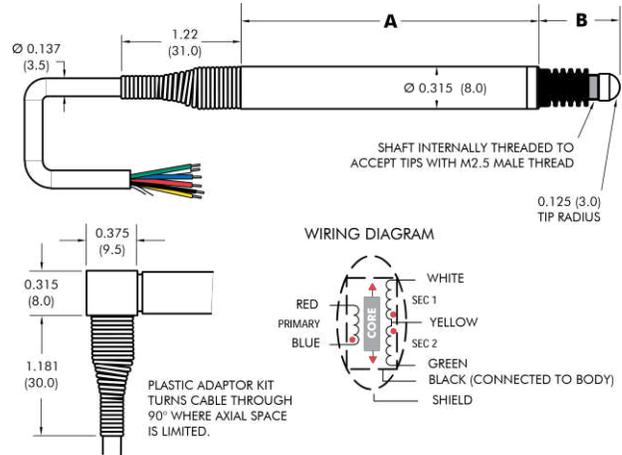


BBP/BBT 375 Specifications

Model ▶	BBP 375-040 BBT 375-040	BBP 375-100 BBT 375-100	BBP 375-200 BBT 375-200
Parameter ▼			
Range (inches)	±0.040	±0.100	±0.200
Range (mm)	±1.0	±2.5	±5.0
Sensitivity (mV/V/.001 in)	5.3	3.8	2.7
Sensitivity (mV/V/mm)	210	150	105
Pretravel (inches)	0.006	0.006	0.006
Pretravel (mm)	0.15	0.15	0.15
Overtravel (inches)	0.014	0.033	0.033
Overtravel (mm)	0.35	0.85	0.85
Dimension "A" (inches)	1.89	2.68	3.58
Dimension "A" (mm)	48.0	68.0	91.0
Dimension "B" (inches) (fully extended)	0.56	0.69	1.01
Dimension "B" (mm) (fully extended)	14.15	17.65	25.65

BBP 375

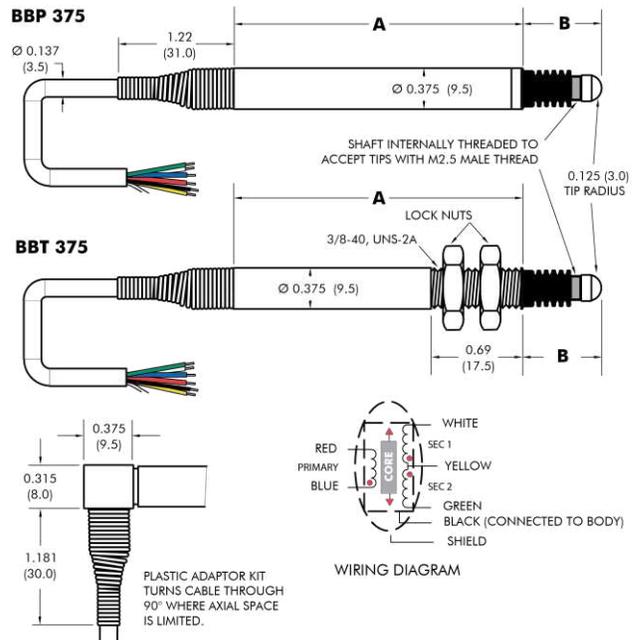

BBT 375

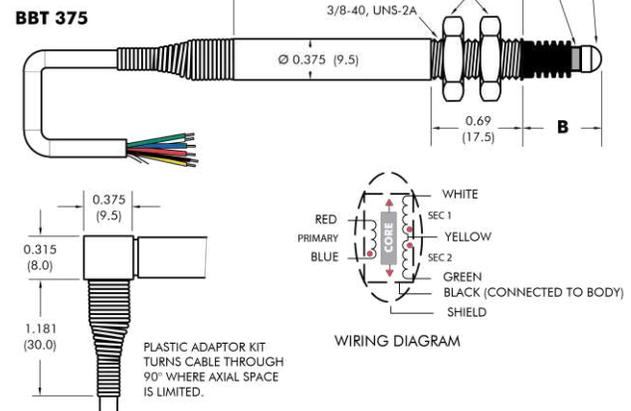


ULTRAHIGH PRECISION

BBP 315 | BBP/BBT 375 | BBP/BBT 375-A | LVDT Gaging Probes

BBP/BBT 375-A Specifications

Model	BBP 375-A-040	BBP 375-A-100	BBP 375-A-200
Parameter	BBT 375-A-040	BBT 375-A-100	BBT 375-A-200
Range (inches)	±0.040	±0.100	±0.200
Range (mm)	±1.0	±2.5	±5.0
Sensitivity (mV/V/.001 in)	5.3	3.8	2.7
Sensitivity (mV/V/mm)	210	150	105
Pretravel (inches)	0.006	0.006	0.006
Pretravel (mm)	0.15	0.15	0.15
Overtravel (inches)	0.014	0.033	0.033
Overtravel (mm)	0.35	0.85	0.85
Dimension "A" (inches)	1.89	2.68	3.58
Dimension "A" (mm)	48.0	68.0	91.0
Dimension "B" (inches) (retracted)	0.43	0.45	0.57
Dimension "B" (mm) (retracted)	11.05	11.55	14.55
Dimension "B" (inches) (fully extended)	0.56	0.69	1.01
Dimension "B" (mm) (fully extended)	14.15	17.65	25.65

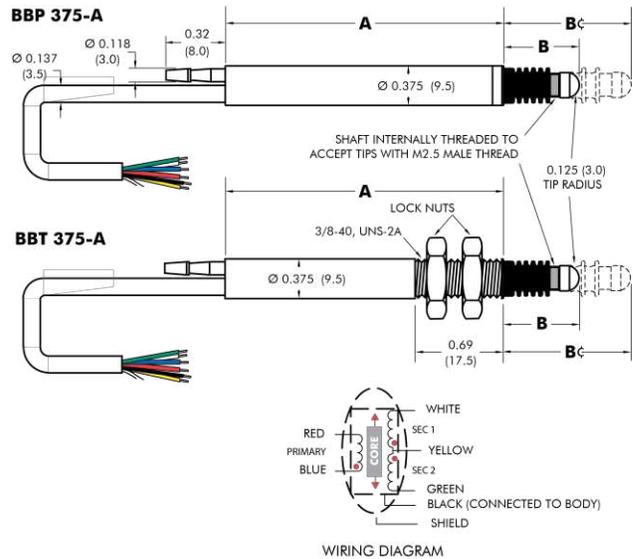

NORTH AMERICA

AST Macro Sensors,
a TE Connectivity company
7300 US Route 130 North
Pennsauken, NJ 08110-1541 USA
Tel +1 856 662 8000
Fax +1 856 317 1005
sales@macrosensors.com

TE.com/sensorsolutions

AST Macro Sensors, a TE Connectivity company.

AST Macro Sensors, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

BBP 315 | BBP/BBT 375 | BBP/BBT 375-A 11/01/15